

Title:	DS-PHA How to Configure Keypad Lock Time	Version:	v1.0	Date:	03/27/2020
Product:	DS-PHA Series Hybrid Security Control Panel			Page:	1 of 3

Preparation

1. PHA Series Hybrid Security Control Panel
2. Internet Explorer
3. LED Keypad Module or LCD Keypad Module

DS-PHA How to Configure Keypad Lock Time

When you use Keypad to arm and disarm the Panel, if your authentication failed for the amount of configured time, the module will be locked for the programmed time duration. You can configure the Max failure time and locked duration in web interface.

1. Login web interface

- 1) Login with admin account or installer account.
- 2) Click **System** → **Security** → **Module Lock Settings** to enter the Module Lock Settings page.

No.	Device Type	Max. Failure Attempts	Locked Duration	Status	Operation
1	Keypad	3	90	Unlocked	

- 3) Select a module from the list, and click the
- 4) Set the following parameters of the selected module.


Max. Failure Attempts

If a user continuously tries to authentication a password for more than the configured attempts permitted, the keypad will be locked for the programmed duration.

Locked Duration


Set the locking duration when the keypad is locked. After the configured duration, the keypad will be unlocked.

Title:	DS-PHA How to Configure Keypad Lock Time	Version:	v1.0	Date:	03/27/2020
Product:	DS-PHA Series Hybrid Security Control Panel			Page:	2 of 3

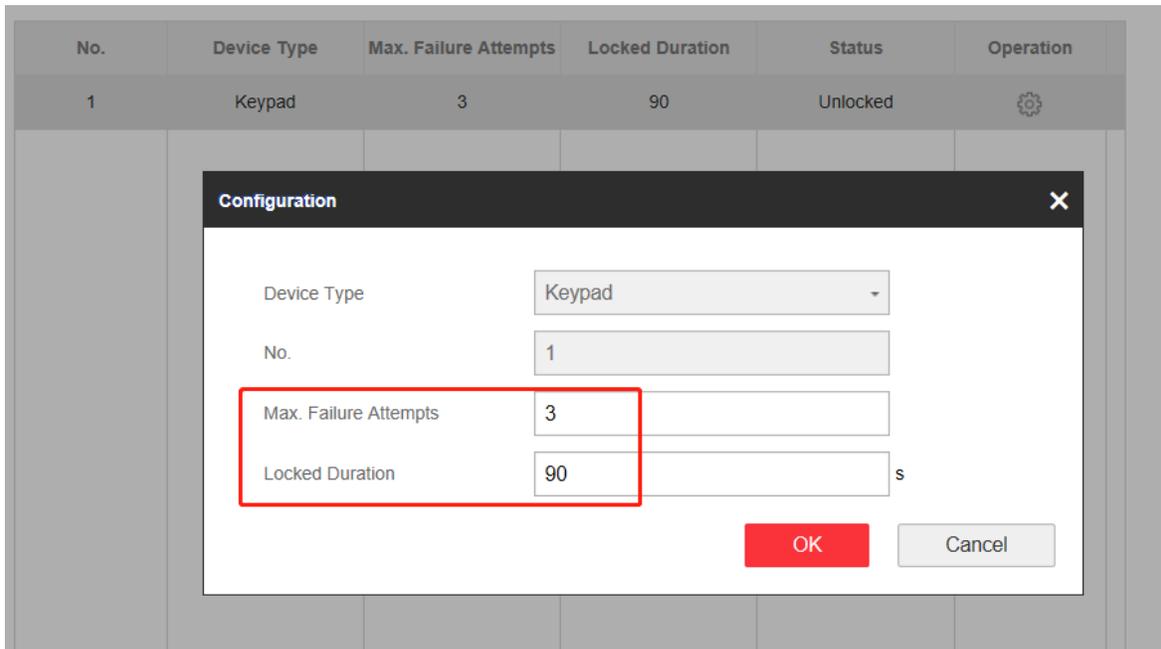

Note:

When the keypad has locked, Click the  icon to unlock the locked module

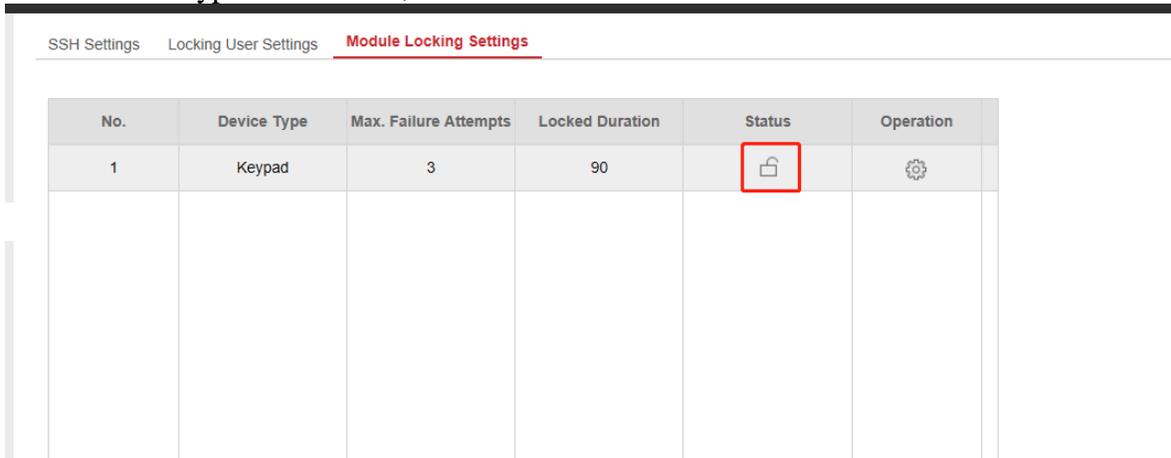

See Far, Go Further
HIKVISION Technical Support