

HIKVISION®

Vandal-Proof Access Control Terminals

Unified Security with Robust Protection



DS-K1T502 Series DS-K1T805 Series

What We Offer

Hikvision's vandal-proof access control terminals, the DS-KIT502 Series and DS-K1T805 Series, come with robust metal housing and high protection levels against vandalism and moisture, making them ideal for outdoor access control scenarios.

DS-K1T502 Series

All-in-one management of access control, video intercoms, and video security



DS-K1T805 Series


The slimmer design makes it suitable for installation in space-limited areas




Easy device configuration & operation

Simple web configuration using **AP MODE** (Wi-Fi supported) on mobile or PC client

1 Easy device connection via **AP mode**

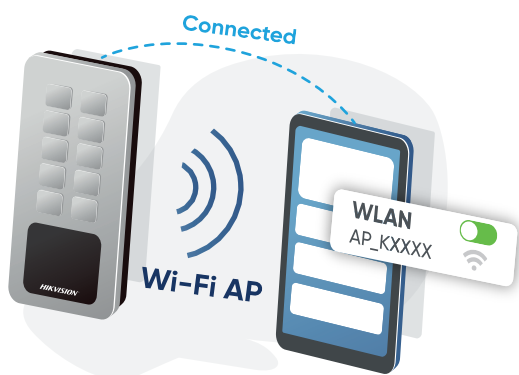

2 Easy web configuration via mobile device or PC

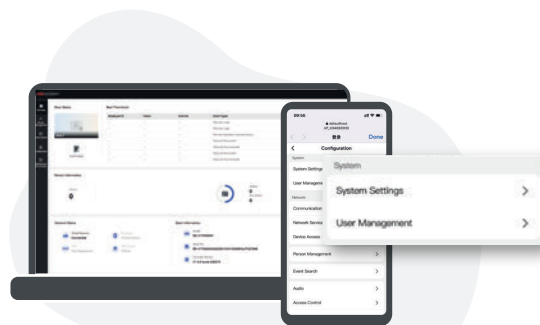

3 Remote access control via the Hik-Connect App or mobile web



Multiple authentication methods




Card



PIN Code



Fingerprint



Bluetooth



DS-K1T502 Series

Card

100,000

Card Type

M1, DESFire, Felica

Fingerprint

10,000



DS-K1T805 Series

100,000

M1, EM

3,000

High protection level



Ideal choice for outdoor environments



Robust metal materials for increased stability



DS-K1T502 Series

IP65 & IK09 protections

Zinc alloy



DS-K1T805 Series

IP65 & IK08 protections

Aluminum alloy

Protection level

Material

All-in-one management

* DS-K1T502 Series supports all-in-one management

* DS-K1T805 Series only supports access management




Video Security


Remotely check live view via



Hik-Connect
mobile App



HikCentral Access Control
Platform

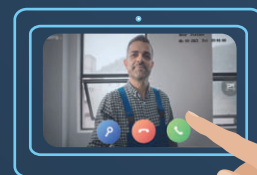

Indoor Station



Video Intercom

Convenient video intercom via indoor stations
or mobile Hik-Connect App



Access Control



Fingerprint



Card



PIN code



Bluetooth

Product Showcase





DS-K1T502 Series



DS-K1T805 Series

Camera	2MP	—
Operation system	Linux	Linux
Card type	M1, DESFire, Felica	M1, EM
Card capacity	100,000	100,000
Fingerprint capacity	10,000 (optional)	3,000 (optional)
Event capacity	300,000	100,000
Protection level	IP65, IK09	IP65, IK08
Communication	Wi-Fi RS-485, Wiegand Bluetooth	Wi-Fi RS-485, Wiegand Bluetooth
Installation	Wall Mounting	Wall Mounting
Material	Zinc Alloy	Aluminum Alloy



VANDAL-PROOF
Access Control Terminals
Unified Security with Robust Protection



www.hikvision.com
support@hikvision.com



HIKVISION®